

8 Output Module Datasheet



ADDRESS: Ikitelli OSB Mah. Cevre
14. Blok Sok. Telas Blok Dis Kapi
No: 1 Kat: 1-2 Basaksehir/Istanbul

Phone: +90 212 438 80 24
Fax: +90 212 438 80 25

info@gruparge.com

1.1. General Features


8 relay outputs on the device can be remotely controlled with Standard Modbus RTU. It can be remotely monitored with SmartPower terminals or integrated into other systems. The COM terminal is the common tip of the relays. When a relay is activated, it outputs the voltage connected to the COM terminal and the voltage output LED lights up. The device can be mounted on the in-panel rail.

Loads up to 5 Amps can be driven directly from the relay output. If a current of more than 5 Amps is to be drawn, it is necessary to control the load via a contactor. In this case, the relay output is used as the trigger signal of the contactor.

1.2. Technical Features


- Microprocessor based.
- OM C8D operates with 10-30 V DC supply.
- OM C8A operates with 85-265 V AC supply.
- Supports RS-485 Standard Modbus RTU protocol.
- There are 8 relays with a contact output current of 3 A (230 V).
- It has POWER, ERROR, RS-485 (Communication) LEDs...
- Operating ambient temperature of the device is between -10 °C and +55 °C
- Supply consumption power is less than 1 VA.
- It has IP40 protection class.

1.3. Technical Drawing

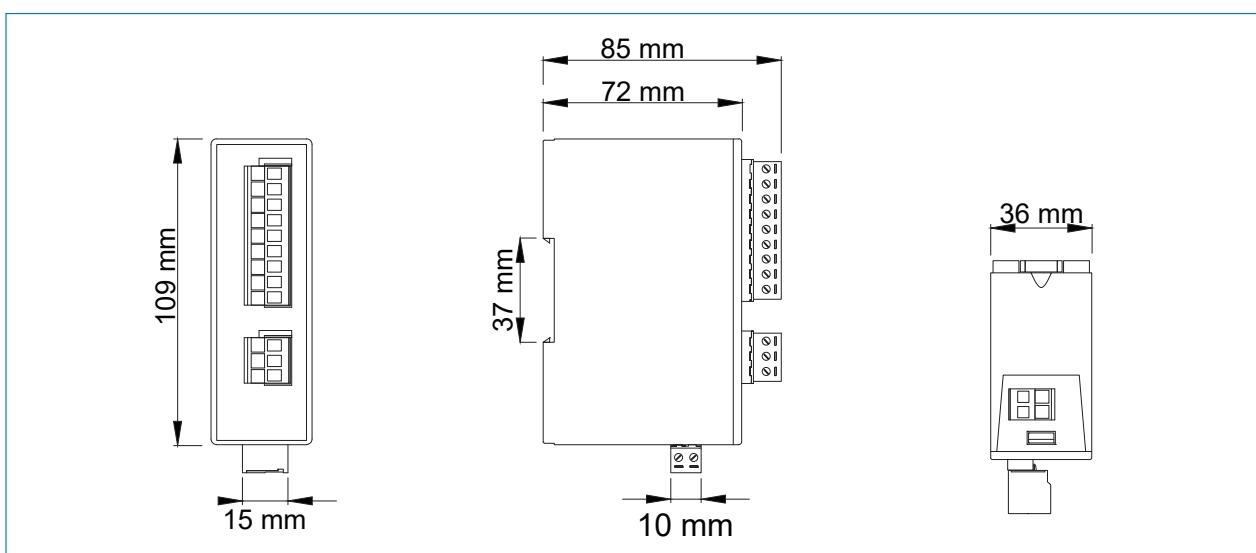


1.4. Connection Diagram

Output Module AC

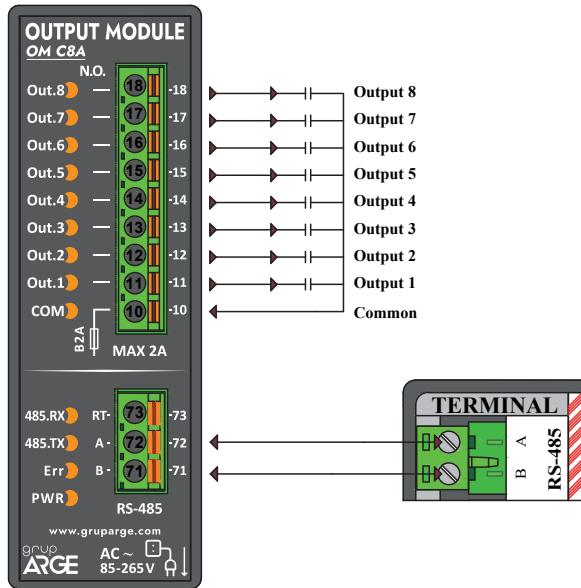


RT Terminal Block: It is used for optional activation of 120 a terminating resistor.

The terminating resistor is connected between RT and A terminals.

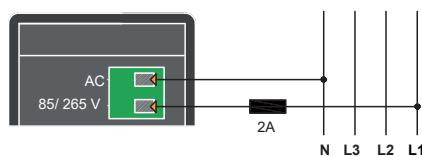


Output Module DC

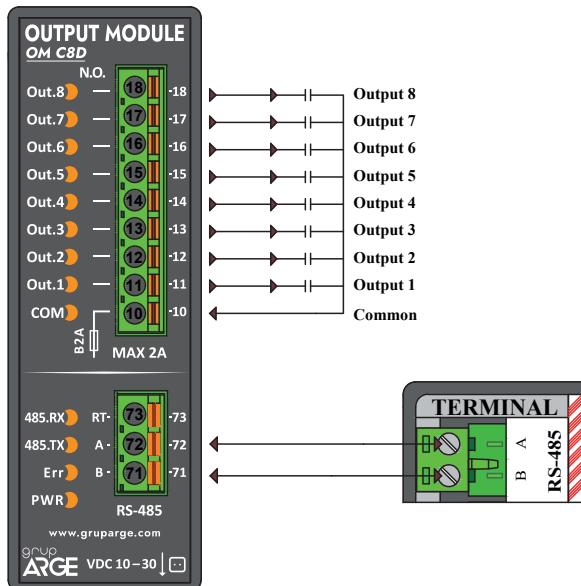

RT Terminal Block: It is used for optional activation of 120 a terminating resistor.

The terminating resistor is connected between RT and A terminals.

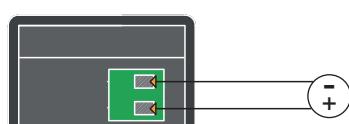

It is recommended to select the cable for RS-485 communications according to the table below.

Cable Distance	Recommended Cable	Alternative Recommendation
Up to 30 m	3*0,22 Shielded and Twisted Signal Cable	CAT-5 Ethernet Cable
Over 30 m	3*0,50 Shielded and Twisted Signal Cable	CAT-6 Ethernet Cable

2. MODBUS MAP

2.1. Communication Parameters

Baudrate	9600 bps
Data Bits	8
Parity	None
Stop Bits	1

NOTE: The default Modbus address is the number obtained by adding 100 to the last two digits of the serial number of the device. For example, suppose the serial number is 185247. Since it ends with 47, Modbus address becomes 147.

2.2. Modbus Speed

Modbus speed is determined by indexes between 0-4. The table below contains Modbus speeds according to the indexes. By adjusting the Bus Speed part of the Modbus map, the desired speed can be obtained from the table below.

Index	0	1	2	3	4
Modbus Speed (Bps)	1200	2400	4800	9600	19200