

Time Relays (Zmn01 & Zmn02) User Manual



ADDRESS: Ikitelli OSB Mah. Cevre
14. Blok Sok. Telas Blok Dis Kapi
No: 1 Kat: 1-2 Basaksehir/Istanbul

Phone: +90 212 438 80 24
Fax: +90 212 438 80 25

info@gruparge.com

CONTENTS

PROPER USE AND SAFETY REQUIREMENTS	3
1. INTRODUCTION	4
1.1. General Features	4
1.2. Technical Features	4
1.3. LED Descriptions	5
1.4. LED Warnings	5
1.5. Use of the Device	6
1.6. Selection Table	6
1.7. Function Diagram	6
1.8. Technical Drawing	7
1.9. Product Assembly and Disassembly	7
1.10. Connection Diagram	8

PROPER USE AND SAFETY REQUIREMENTS



Cut all the power when connecting and disconnecting the device to a panel.



Do not clean the device with a solvent or similar material. Only use a dry cloth.



Please do not intervene to the device when a technical problem is encountered and get in contact with a technical service within the shortest time.



If the warnings are not taken into account, our company or the authorized dealer shall not be held responsible for the negative consequences.



Do not dispose in the trash, the device must be delivered to the collection centers (electronic device recycling centers). It should be recycled or disposed of without harming human health and environment.



The installation, assembly, activation and operation of the device should be done and used by only expert professionals and in accordance with safety regulations and instructions.

1. INTRODUCTION

1.1. General Features


Electronic time relays are microprocessor-based control devices used in time-critical processes. These devices are specially designed to activate or deactivate a circuit or a system within the set time and function. This relay group, which is generally used in the control panels of power circuits, can basically control the system by changing the relay positions with or without delay. In terms of operating function, there are basically two types of time relays: pull delayed and release delayed. Relays with a delay in pulling are known as straight time relays, while relays with a delay in releasing are known as reverse time relays.

This relay group, which has many different models, has varieties such as flasher model that can operate on and off, right-left relay known as inversion relay in the industry, which is used as an automatic position (direction) changer in automatic systems and repeats this process at intervals determined by the time setting on it, triggered time relay that can operate with trigger detection, star-delta time relay that controls the star-delta connection on a time basis.

1.2. Technical Features

- **Operating Voltage:** 18-28 V AC/DC
180 - 280 V AC
- **Operating Frequency:** 50 / 60 Hz.
- **Time Interval (toff):** 0.1 sec-30 sec. (ZMN01)
0.1 sn-60 sn. (ZMN02)
- **Relay Output:** 1C/O, 5A, 1250 VA
- **Adjustment:** Potentiometer
- **Indicator:** 3 LEDs
- **Ambient Temperature:** -5°C ; +50°C
- **Protection Class:** IP20
- **Mounting:** DIN Rail

1.3. LED Descriptions

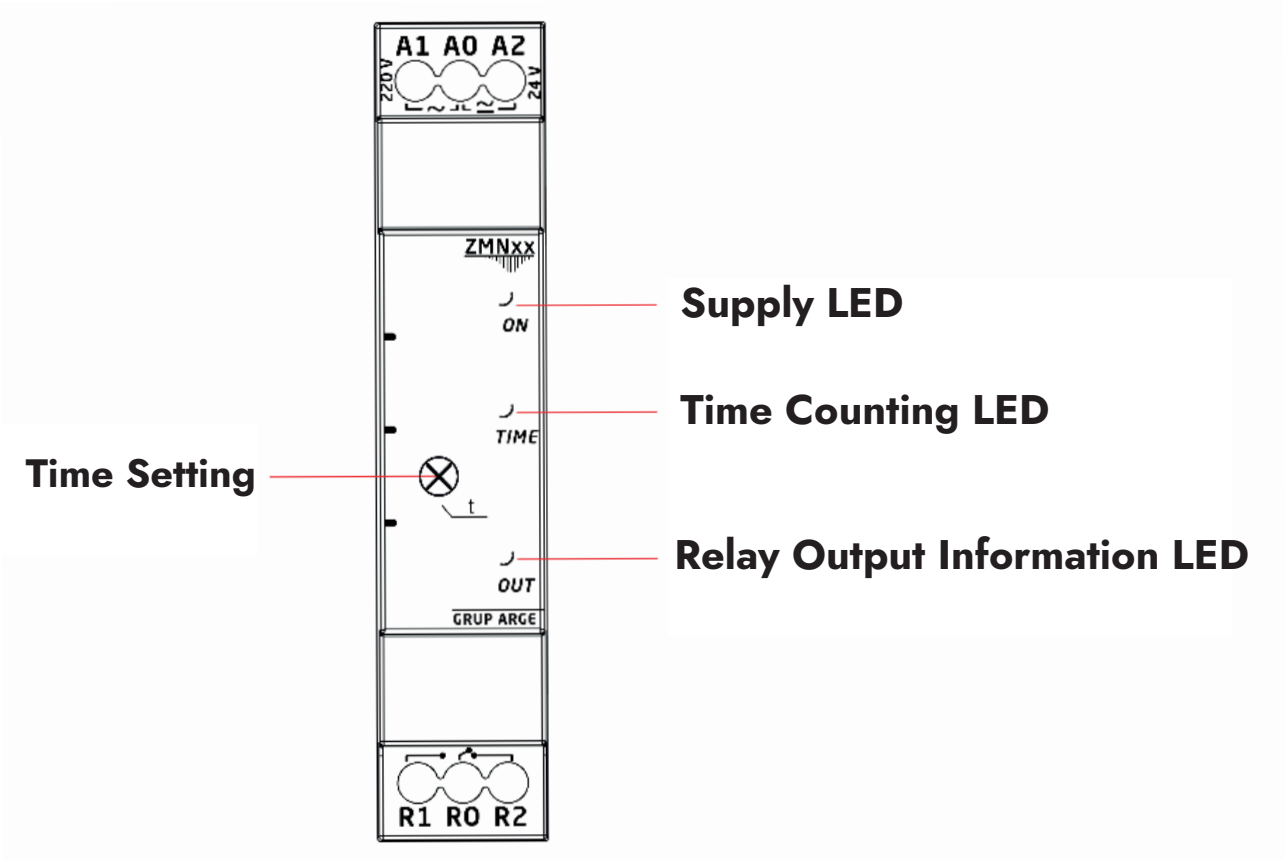

1.4. LED Warnings

	ON	It shows that energy exists. It also flashes when the potentiometer changes.
	TIME	It blinks every second to display the set time.
	OUT	On when the relay is pulled, off when it is not pulled.

Table:1

* Flasher

* Flashing

1.5. Use of the Device

ZMN01 and ZMN02 Time Relays;

When 'U' voltage is applied to the supply input, the 'toff' set process is started. After the end of the 'toff' set process, the relay output turns ON. If the supply voltage is disconnected before the end of the 'toff' set time, the counted time interval is deleted and the 'toff' set time starts counting when the supply voltage is applied again.

1.6. Selection Table

Product Model	ZMN01	ZMN02
Time Range	0.1 sec-30 sec	0.1 sec-60 sec
Withdrawal Delay	√	√
Contact Output	1C/O, 5A, 1250 VA	1C/O, 5A, 1250 VA
24 V AC/DC	√	√
220 V AC	√	√
DIN I Box	√	√

Table:2

1.7. Function Diagram:


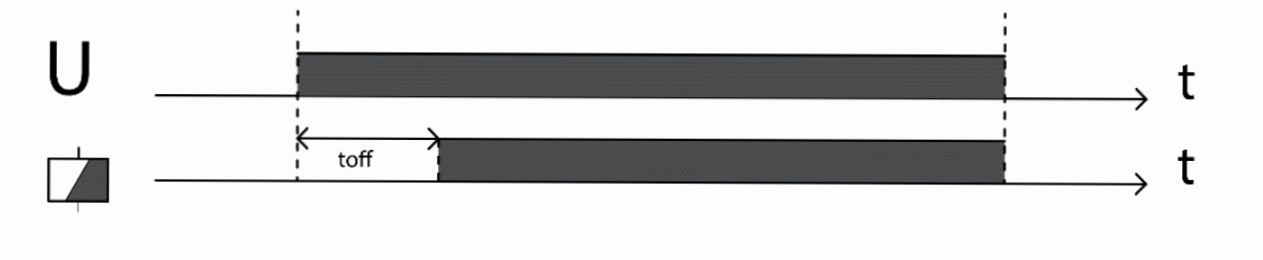
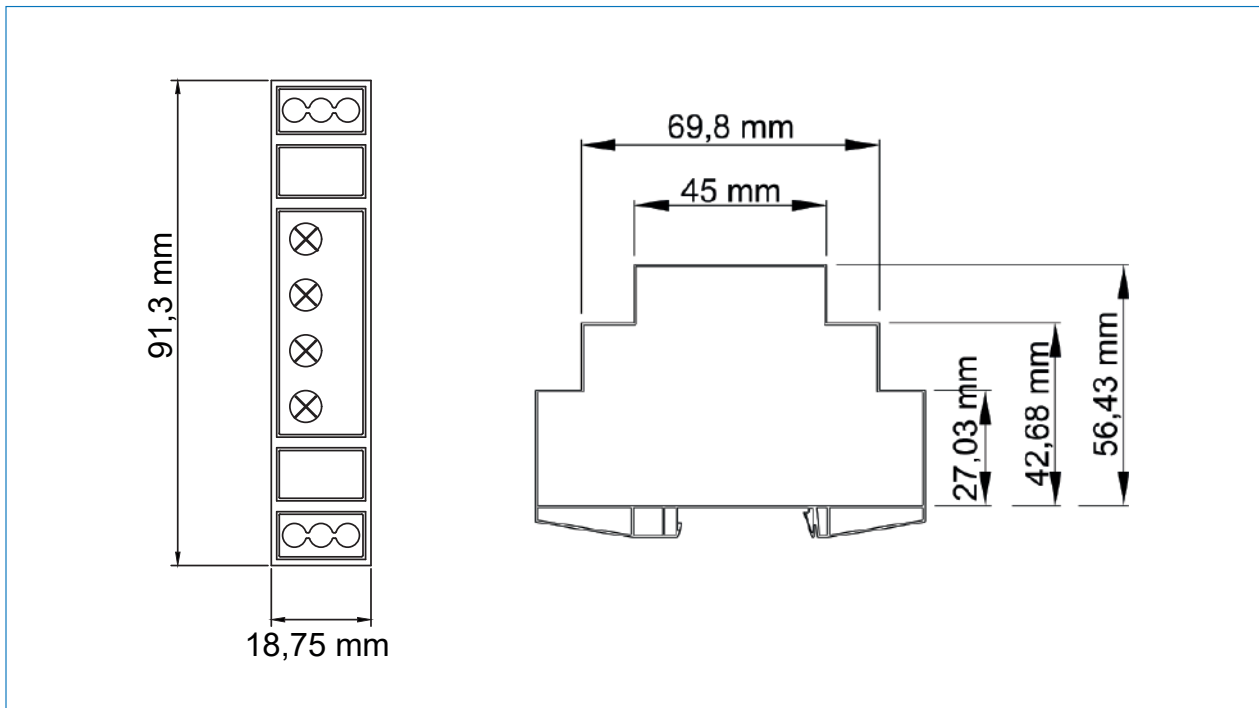
	Relay Voltage
U	Source Voltage


Table:3



1.8. Technical Drawing



1.9. Product Assembly and Disassembly

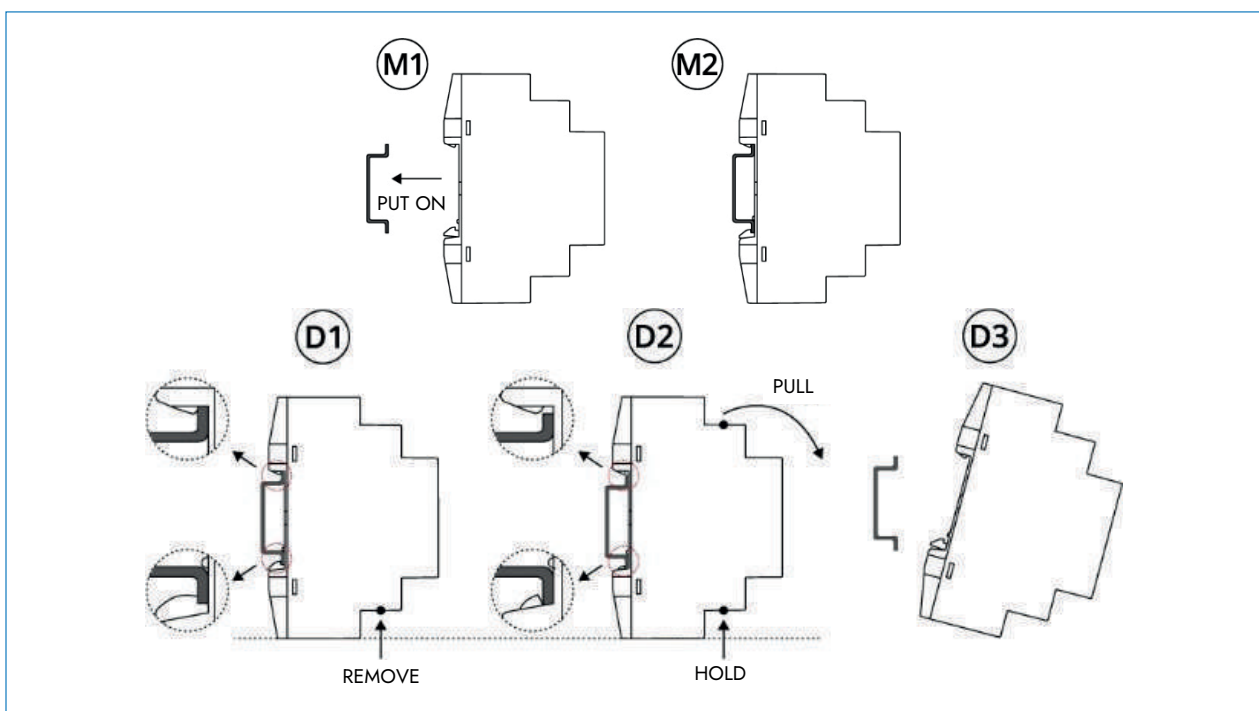

1.10. Connection Diagram

